




Model: Solatube SkyVault Series (29 in./740 mm Daylighting System)

Project: _____

Location: _____

Type: _____

Product Specifications Appear in CSI Division 08, Section 08 62 23. For budgeting and quotations use only. Qty: _____

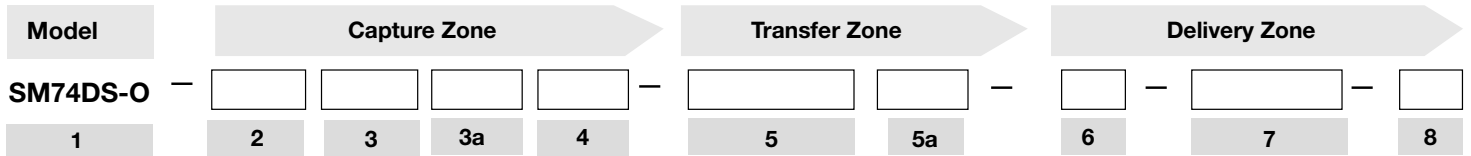

1 Model

Solatube® M74 DS Solatube M74 DS (29 in./740 mm Daylighting System)
Open Ceiling



Capture Zone

2 Collector (Leave blank if not desired)

C Collector with Raybender HD and LightTracker Technologies



3 Domes

DP Polycarbonate Dome

DPP Polycarbonate Outer Dome + PETG Inner Dome



3a Dome Options (Leave blank if not desired)

SG Security Guard*



*Factory Installed

4 Flashings

FC Curb Cap
(Curb by Others)




Transfer Zone

5 Extension Tubes Required*

Run measured from top of flashing to diffuser along centerline of tubing using 24" lengths. See 5a for optional 48" length.

- | | |
|--|--|
| E1 One Extension Tube – Max Run = ~30" | E7 Seven Extension Tubes – Max Run = ~168" |
| E2 Two Extension Tubes – Max Run = ~53" | E8 Eight Extension Tubes – Max Run = ~191" |
| E3 Three Extension Tubes – Max Run = ~76" | E9 Nine Extension Tubes – Max Run = ~214" |
| E4 Four Extension Tubes – Max Run = ~99" | E10 Ten Extension Tubes – Max Run = ~237" |
| E5 Five Extension Tubes – Max Run = ~122" | EXX Total Run Length to be Determined by Bidding Contractor |
| E6 Six Extension Tubes – Max Run = ~145" | |



5a Extension Tube Options (Leave blank if not desired)

*At least one 24" or 48" extension tube required for diffuser

- EL** Optional 48" Extension Tube (Substitute one 48" for two 24" above)
R Trim Ring
TIP Thermal Insulation Panel and Nominal 24" Extension Tube (2 x 12" transition tubes*)
*2 x 12" transition tubes replace 1 x 24" extension tube.



Delivery Zone

6 Bottom Assembly

- B** Base Unit



- A** Amplifier*



*The Amplifier mounts to the bottom extension tube, adding an additional 23.7" to the overall tube run.

7 Diffuser Lens

- L2** Prismatic Diffuser



8 Measurement Standard

- M** Metric **I** Imperial

Accessories (Optional. Order separately)

*transformer for 0-10V Dimmer

TR20 UL Listed Class 2 Transformer 24 VAC, Rated 20 VA

TR96 UL Listed Class 2 Transformer 24 VAC, Rated 96 VA

Example

SM74DS-O-DPP-FC-E2-B-L2-M

Solatube® SkyVault Series M74DS-O (29 in./740 mm Daylighting System), Polycarbonate Outer Dome + PETG Inner Dome, Two Extension Tubes, Base Unit and Prismatic® Diffuser. For metric installations.