




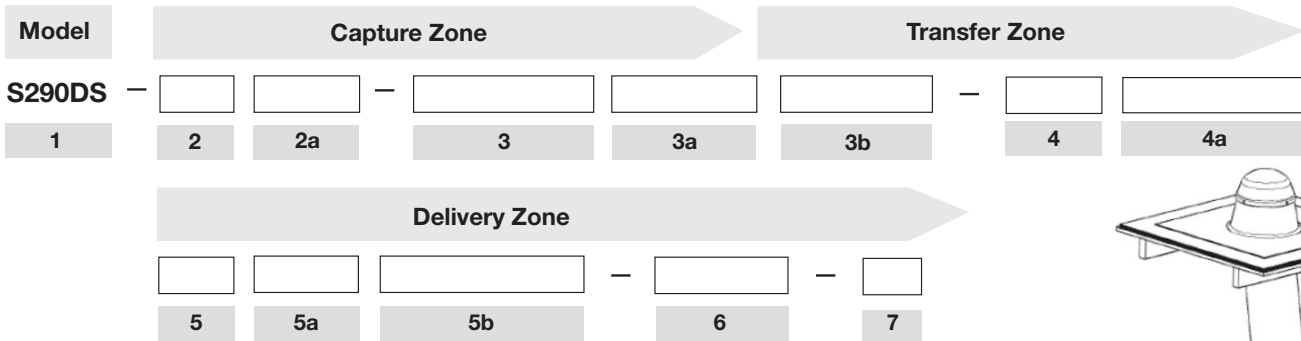
Model: Solatube 290 DS (14 in. /350 mm Daylighting System)

Project: _____

Location: _____

Type: _____

Product Specifications Appear in CSI Division 08, Section 08 62 23. For budgeting and quotations use only. Qty: _____



1 Model

290 DS Brighten Up® Solatube 290 DS (14 in./350 mm Daylighting System)

Capture Zone









2 Domes (Leave blank if not desired)

DA Acrylic Dome **DAI** Acrylic Dome + Shock Inner Dome (Acrylic)
Required for High Velocity Hurricane Zones

2a Dome Options (Leave blank if not desired)

PB Dome Edge Protection Band **FG** Rooftop Fire Glazing
Required for High Fire Zones

3 Flashings

<p>FP 4 in. (102 mm) Pitched Metal, Self Mounted</p> 	<p>FT 4 in. (102 mm) Tile Roof, No Pitch Metal Flashing</p> 	<p>C14** Metal Insulated Curb 26-1/2in. x 26-1/2 in. x 14 in. (673 mm x 673 mm x 355.5 mm)</p> 
<p>FPT 4 in. (102 mm) Tile Roof, Pitched Metal Flashing</p> 	<p>F6 6 in. (152 mm) Flat/No Pitch Metal, Self Mounted</p> 	<p>C16** Metal Insulated Curb 26-1/2in. x 26-1/2 in. x 16 in. (673 mm x 673 mm x 406.5 mm)</p> 
<p>F1.5 1.5-inch (38 mm) Flat/No Pitch Metal, Self Mounted</p> 	<p>FC Curb Cap (curb by others)</p> 	<p>C20** Metal Insulated Curb 26-1/2in. x 26-1/2 in. x 20 in. (673 mm x 673 mm x 508 mm)</p> 
<p>F4 4 in. (102 mm) Self Mounted</p> 	<p>C12** Metal Insulated Curb 26-1/2in. x 26-1/2 in. x 12 in. (673 mm x 673 mm x 305 mm)</p> 	

** Only product that is FM approved. Must use Dome Polycarbonate (DP). It is required that a dome Edge Protection Band (PB) is used with FM approved flashings and (F8 & F11). The Dome Edge Protection Band for the Curb Cap (PBC) must be used with FM approved Curb Cap (FC).

** Curbs designed for single-ply roofing, lightweight fill or tapered insulation low slope roof types.

3a Flashing Options (Leave blank if not desired)

- | | |
|---|--|
| T2* Roof Flashing Turret Extension 51 mm/2 in | T36* Roof Flashing Turret Extension 914 mm/36 in |
| T4* Roof Flashing Turret Extension 102 mm/4 in | T48* Roof Flashing Turret Extension 1219 mm/48 in |
| T12* Roof Flashing Turret Extension 305 mm/12 in | MR Metal Roof Installation Kit |
| T24* Roof Flashing Turret Extension 610 mm/24 in | |

* Specify additional extension tubes in #4

3b Insulation Options (Leave blank if not desired)


- | | | |
|------------------------------|--------------------------------|-------------------------------------|
| FI Flashing Insulator | CCI Curb Cap Insulation | TIP Thermal Insulation Panel |
|------------------------------|--------------------------------|-------------------------------------|

Transfer Zone

4 Extension Tubes Required

Run measured from top of flashing to bottom of ceiling plane along centerline of tubing (allow for 2" tube overlap).

- | | |
|---|--|
| ET0 Base Kit, No Tubes – Max Run = 22 in. (559 mm) | ET7 Seven Extension Tubes – Max Run = 148 in. (3759 mm) |
| ET1 One Extension Tube – Max Run = 40 in. (1016 mm) | ET8 Eight Extension Tubes – Max Run = 166 in. (4216 mm) |
| ET2 Two Extension Tubes – Max Run = 58 in. (1473 mm) | ET9 Nine Extension Tubes – Max Run = 184 in. (4674 mm) |
| ET3 Three Extension Tubes – Max Run = 76 in. (1930 mm) | ET10 Ten Extension Tubes – Max Run = 202 in. (5131 mm) |
| ET4 Four Extension Tubes – Max Run = 94 in. (2388 mm) | EXX Total Run Length to be Determined by Bidding Contractor |
| ET5 Five Extension Tubes – Max Run = 112 in. (2845 mm) | |
| ET6 Six Extension Tubes – Max Run = 130 in. (3302 mm) | |



4a Extension Tube Options (Leave blank if not desired)

- | | |
|--|-----------------------------------|
| AT1 One 0-90 Degree Extension Tube (Angle Adapter) | E Wire Suspension Kit |
| AT2 Two 0-90 Degree Extension Tubes (Angle Adapter) | SCG Severe Climate Glazing |

Delivery Zone

5 Diffusers/Decorative Fixtures*

- | | | |
|--|---|--|
| L4 Classic Vusion™ Diffuser  | L9 JustFrost Decorative Fixture  | L15 AuroraGlo Decorative Fixture (White)  |
| L5 Classic Optiview Wide  | L10 TierDrop Decorative Fixture  | L16 AuroraGlo Decorative Fixture (Bronze)  |
| L6 Classic Optiview Superwide | | |
| L7 Classic Optiview Narrow | | |

*Must order Effect Lens; does not come standard

5a Effect Lenses

- | | |
|---------------------------------|---------------------------------------|
| LN Natural Effect Lens | LW Warm Effect Lens |
| LS Softening Effect Lens | LWS Warm Softening Effect Lens |

5b Options (Leave blank if not desired)

- | | |
|--|--------------------------|
| INC Universal Light Add-On Kit with Medium Screw Base (Accepts two 23W Maximum Fluorescent Lamp, Medium Base, Total Maximum Length 4 3/4 in. (120 mm) - Not Included) 110 V | LED 4,000K/80CRI |
| D1 0-10V Daylight Dimmer | L309 3,000K/90CRI |
| | L359 3,500K/90CRI |
| | L409 4,000K/90CRI |

6 Accessories (Order separately.)

S1 Low voltage 0-10V switch (white) required to operate Solatube 010V Daylight Dimmers. Only one switch per forty-eight (48) synchronously controlled dimmers. (For 'D1' only) Note: For use when no controls have been specified and customer is looking for an off-the-shelf solution.

TR20 UL Listed Class 2 Transformer 24 VAC, Rated 20 VA (For 'D1' only)

TR96 UL Listed Class 2 Transformer 24 VAC, Rated 96 VA (For 'D1' only)

7 Measurement Standard

M Metric **I** Imperial

Example **S290DS-DA-F4-ET4-L15-LN-D1-INC-M**
Brighten Up® Series Solatube 290 DS (350 mm/14 in Daylighting System), Acrylic Dome, 4 in. (102 mm) high Flat/No Pitch Self Mounted Flashing, 4 Extension Tubes, AuroraGlo White Decorative Fixture, Natural Effect Lens, Daylight Dimmer and Universal Light Add-On Kit. For metric installations.

