

3300® PROFESSIONAL GRADE POLYURETHANE SEALANT

PRODUCT NAME:

3300® Professional
Grade Polyurethane Sealant

MANUFACTURER:

Geocel Products Group
A Business Unit of
The Sherwin-Williams Company
("Geocel Products Group")
Cleveland, OH 44115
Phone: 800-348-7615
Fax: 800-348-7009
GeocelUSA.com

PRODUCT DESCRIPTION:


3300® Professional Grade Polyurethane Sealant is a single-component, high-performance polyurethane sealant that withstands adverse weather conditions and cures to a flexible weatherproof seal.

Product Benefits:

- Withstands adverse weather conditions
- Meets ASTM C 920
- Moisture cure
- Remains flexible
- Minimal shrinkage
- Non-sag formula
- Primerless adhesion on most surfaces
- Paintable, non-corrosive
- Contains no TDI (toluene diisocyanate)

Basic Uses: 3300 Sealant can be used in roofing applications such as concrete roofing tile, clay roofing tile, metal roofing, coated steel (Kynar 500® based finishes) and composition shingles. Other applications include building lath paper repair, gutters, HVAC, flashing, skylights, roofing seams, roofing projections, termination points and vents.

Adheres To: Masonry, ceramics, wood, steel, coated steel (Kynar 500® based finishes), aluminum, asphalt shingles, building paper, BUR, concrete, fiberglass and other common building substrates.

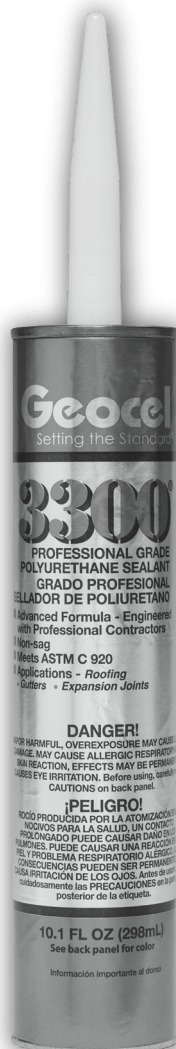

Grade: Gun grade consistency

Primer: Not required on most surfaces

Packaging: 10.1 fl. oz. cartridges

Colors: White, gray, limestone, bronze, medium bronze, tan, aluminum gray, black and redwood tan

Application Standards: Meets ASTM C 920 Type S, Grade NS, Class 25, Use NT, A, M, G, and O; meets Federal Specification TT-S-0230 C, Type II, Class A; meets Canadian Specification CAN/CGSB-19.13-M87 Class 2 Non-sag, Class 25, Class M.

Limitations:

- Do not apply over damp or contaminated surfaces
- Do not apply to absorptive surfaces such as marble, limestone or granite without prior testing for discoloration or staining
- Do not use for potable water applications

INSTALLATION:

Joint Design: The width of the joint should be a minimum of 4 times the anticipated movement. In joints up to 1/2" wide, the depth of the sealant should be equal to the width, but not less than 1/4". In joints wider than 1/2", the depth should be maintained at 5/8". Lap shear joints should have a width of at least twice the anticipated movement.

Surface Preparation: Joints to receive sealant must be sound, smooth, uniform in dimensions and free from defects and foreign material. They must be clean, dry and free of frost and all contaminants, such as curing compounds, sealers (waterproofing), coatings, etc.

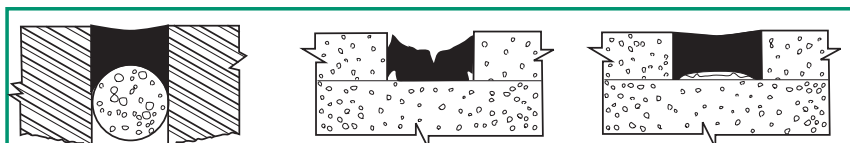


FIGURE 1

Proper Depth Control
The effects on the sealant with and without bond breakers are illustrated in Figures Two and Three.

FIGURE 2

Joints without Bond Breaker

FIGURE 3

Joints with Bond Breaker

THERE IS A DIFFERENCE

	NON-CORROSIVE	PAINTABLE	Adheres to: WOOD	BRICK (unprimed)	ASPHALT SHINGLES	METAL	VINYL	CONCRETE (unprimed)	BUILDING LATH PAPER
POLYURETHANE	●	●	●	●	●	●	●	●	●
SILICONE	●	●	●	●	●	●	●	●	●

Kynar 500® is a registered trademark of Arkema Inc. and is used under license.

Sealant adhesion should be tested on each different substrate prior to caulking. To test adhesion, apply a sealant bead and allow to cure thoroughly. Then pull one end of the bead to test adhesive strength.

Joint Backing: Joint depth should not exceed 5/8". An open cell backer rod should be used to control joint depth. In shallow joints, a bond breaker tape should be installed to prevent three-point contact.

Elongation: 881%

Tack Free: 3 hours

Cure: 1 day

Application and Tooling: Apply with conventional caulking equipment. Fill joints from the back to prevent voids and air pockets. If application temperature is below 40 °F (5 °C), precautions should be taken to ensure the substrates are completely dry and frost free. Immediately after application, tooling is recommended to ensure firm, full contact with the joint sides.

Cleaning: Remove 3300 Sealant from gun and tools before it cures. This may be done by scraping and use of solvents such as Xylol. Follow manufacturer's instructions for safe use. Cured materials may be removed by cutting with sharp tools or sandpapering.

Storage and Shelf Life: Unopened containers should be protected from heat, moisture and direct sun. Do not open containers until all preparatory work has been completed. Material in unopened containers is usable for up to one year when stored at 75 °F (25 °C).

Cautions: CONTAINS ALIPHATIC POLYISOCYANATE. HEXAMETHYLENE DIISOCYANATE. AROMATIC POLYISOCYANATE. POLYMETHYLENE POLYPHENYL ISOCYANATE. METHYLENEDIPHENYL DIISOCYANATE. CRYSTALLINE SILICA VAPOR HARMFUL. Gives off harmful vapor of solvents and isocyanates. DO NOT USE IF YOU HAVE CHRONIC (LONG-TERM) LUNG OR BREATHING PROBLEMS, OR IF YOU HAVE EVER HAD A REACTION TO ISOCYANATES. USE ONLY WITH ADEQUATE VENTILATION. A POSITIVE-PRESSURE, AIR-SUPPLIED RESPIRATOR (NIOSH approved) SHOULD BE WORN TO PREVENT EXPOSURE. IF UNAVAILABLE, AN APPROPRIATE, PROPERLY FITTED, APPROVED NIOSH VAPOR/PARTICULATE RESPIRATOR MAY BE EFFECTIVE. Follow directions

for respirator use. Wear the respirator for the whole time until all vapors are gone. If you have any breathing problems during use, LEAVE THE AREA and get fresh air. If problems remain or happen later, IMMEDIATELY call a doctor — If not available, get emergency medical treatment. Have the label with you. Adequate ventilation required when sanding or abrading the dried film. If adequate ventilation cannot be provided, wear an approved particulate respirator (NIOSH approved). Follow respirator manufacturer's directions for respirator use. IRRITATES SKIN AND EYES. Avoid contact with eyes and skin. In case of eye contact, flush immediately with plenty of water for 15 minutes and call a doctor — If not available, get emergency medical treatment. In case of skin contact, wash thoroughly with soap and water. Clothes contaminated by a spill should be removed and laundered. Keep container closed when not in use. Reacts with water in closed container to produce pressure, which may cause container to burst. Do not transfer contents to other containers for storage.

First Aid: In case of eye contact, flush thoroughly with large amounts of water. Get medical attention if irritation persists. If swallowed, call Poison Control Center, a hospital emergency room or a physician immediately. DELAYED EFFECTS FROM LONG-TERM OVEREXPOSURE. Abrading or sanding of the dry film may release crystalline silica, which has been shown to cause lung damage and cancer under long-term exposure.

Warning: This product contains chemicals known to the state of California to cause cancer and birth defects or other reproductive harm. DO NOT TAKE INTERNALLY. KEEP OUT OF THE REACH OF CHILDREN.

AVAILABILITY AND COST:

Available from various lumber yards, hardware stores, home centers, construction material and industrial distributors. Cost and further technical data are available from your local Geocel Products Group representative or from our office.

LIMITED WARRANTY:

If when applied according to label directions this product fails to perform in accordance with its published literature, upon satisfactory evidence of product

failure, and as your sole remedy, we will either replace the product at no cost or refund the original purchase price for that portion of product that fails to perform in accordance with this limited warranty. Labor or costs associated with labor are not included. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY, WHICH ARE ALL DISCLAIMED AND/OR LIMITED IN DURATION TO THE EXTENT PERMITTED BY LAW. WE SHALL NOT BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING LOST PROFITS) FROM ANY CAUSE WHATSOEVER AND SUCH DAMAGES ARE EXPRESSLY EXCLUDED. Some states do not allow the exclusion or limitation of incidental or consequential damages or how long an implied warranty lasts, so the above limitation or exclusion may not apply to you. This limited warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

MAINTENANCE:

If sealant is damaged and the bond is intact, cut out the damaged area and recaulk. No primer is required. If the bond has been affected, remove the sealant, clean and prepare the joint in accordance with the instructions under "Surface Preparation" and recaulk.

TECHNICAL SERVICES:

Geocel Products Group representatives throughout the U.S. are available to provide technical assistance. Geocel Products Group's in-house technical staff and laboratory facilities are equipped to respond to specific requests for further information and/or applications testing.

THEORETICAL YIELD Per 10.1 fl. oz. Cartridge

Joint Size	Linear Feet
1/4" x 1/4"	24.1
1/4" x 3/8"	16.0
1/4" x 1/2"	12.0
1/2" x 3/8"	8.4
1/2" x 1/2"	6.0
3/4" x 1/2"	4.0

For additional product information, refer to the product spec sheet located at GeocelUSA.com.